

Fresnel S



Fresnel M



Fresnel L




Fresnel 2S



Fresnel SM



Fresnel 2M



Fresnel Wall S




Fresnel Wall M



Fresnel Wall L



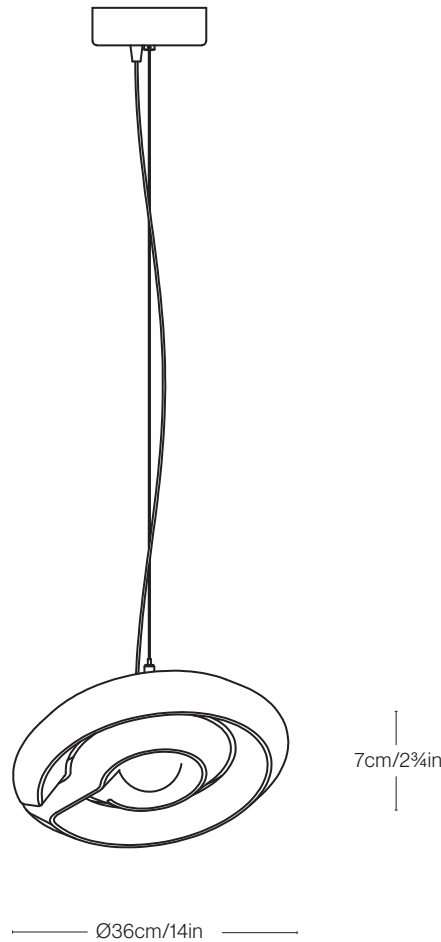

DIMENSIONS

Ø36cm/14 in
H7cm/2¾in

WEIGHT

2kg/4½lbs

MATERIALS

Recycled plastic, aluminium

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of lamp can be manually adjusted by swivelling shade around suspension ball.

SUSPENSION

Adjustable on site up to 300cm/118in. Longer cables can be supplied upon request.

CANOPY

Ø18cm/7in, 1.5kg/3lbs, tumbled aluminium finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 46 Watts
Light output: 4600 Lumens
Color temperature: 2700K
95+ CRI
Life hours 50.000

POWER SUPPLY

Integrated in canopy (multiple light power supply available by request)
Input: 120-277VAC, 0,6A, 50/60HZ
TRIAC/ELV/0-10V dimmable

DIMMING

The Fresnel is equipped for MAINS dimming (TRIAC) and 0-10V.

COMPLIANCE

CE, transformers (120-277V to 24V) comply with UL standards


CARE

Please ensure that the plastic never comes into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.



Fresnel M | SPECSHEET

kooij.com
office@kooij.com
+31 (0) 20 247 9600

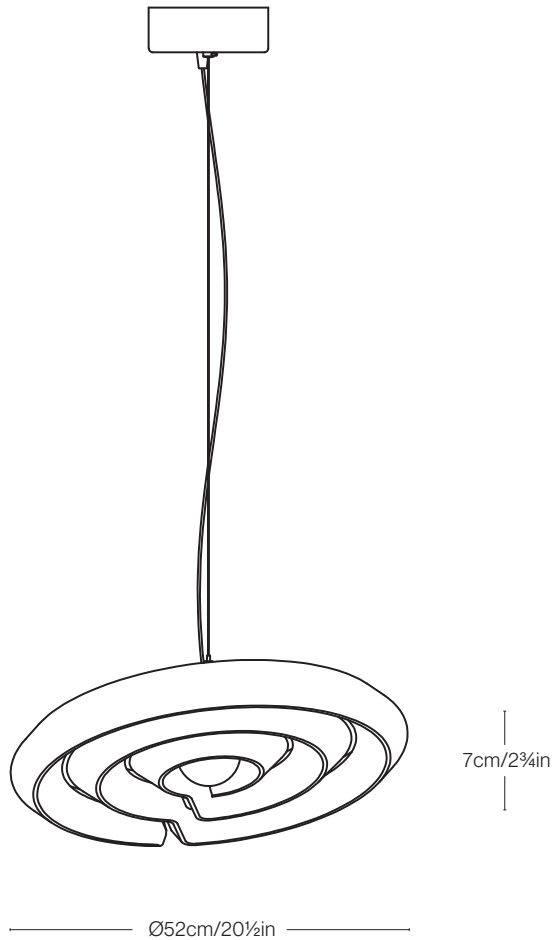

DIMENSIONS

Ø52cm/20½in
H7cm/2¾in

WEIGHT

4kg/9lbs

MATERIAL

Recycled plastic, aluminium

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of lamp can be manually adjusted by swivelling shade around suspension ball.

SUSPENSION

Adjustable on site up to 300cm/118in. Longer cables can be supplied upon request.

CANOPY

Ø18cm/7in, 1.5kg/3lbs, tumbled aluminium finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 46 Watts
Light output: 4600 Lumens
Color temperature: 2700K
95+ CRI
Life hours 50.000

POWER SUPPLY

Integrated in canopy (multiple light power supply available by request)
Input: 120-277VAC, 0,6A, 50/60HZ
TRIAC/ELV/0-10V dimmable

DIMMING

The Fresnel is equipped for MAINS dimming (TRIAC) and 0-10V.

COMPLIANCE

CE, transformers (120-277V to 24V) comply with UL standards


CARE

Please ensure that the plastic never comes into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.



Fresnel L | SPECSHEET

kooij.com
office@kooij.com
+31 (0) 20 247 9600

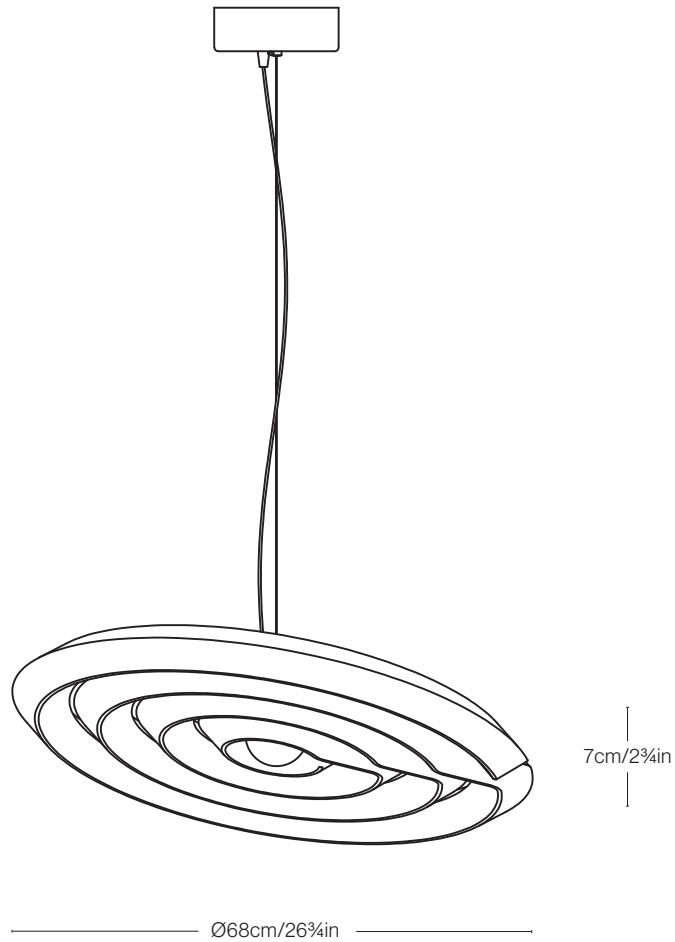

DIMENSIONS

Ø68cm/26 3/4in
H7cm/2 3/4in

WEIGHT

6kg/13.2lbs

MATERIAL

Recycled plastic, aluminium

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of lamp can be manually adjusted by swivelling shade around suspension ball.

SUSPENSION

Adjustable on site up to 300cm/118in. Longer cables can be supplied upon request.

CANOPY

Ø18cm/7in, 1.5kg/3lbs, tumbled aluminium finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 46 Watts
Light output: 4600 Lumens
Color temperature: 2700K
95+ CRI
Life hours 50.000

POWER SUPPLY

Integrated in canopy (multiple light power supply available by request)
Input: 120-277VAC, 0,6A, 50/60HZ
TRIAC/ELV/0-10V dimmable

DIMMING


The Fresnel is equipped for MAINS dimming (TRIAC) and 0-10V.

COMPLIANCE

CE, transformers (120-277V to 24V) comply with UL standards

CARE

Please ensure that the plastic never comes into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.

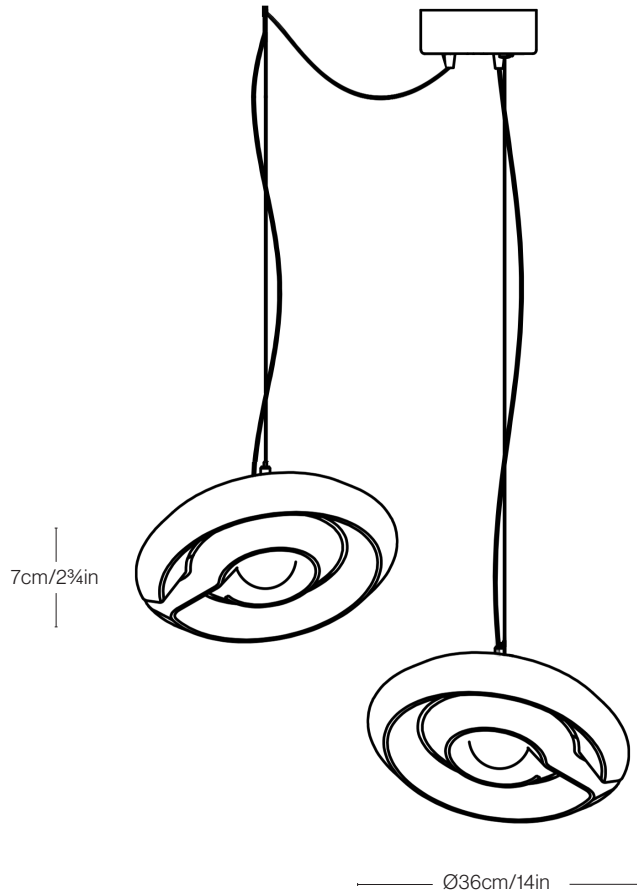

DIMENSIONS

Ø36cm/14in
H7cm/2¾in
+
Ø36cm/14in
H7cm/2¾in

WEIGHT

2kg/4.4lbs
+
2kg/4.4lbs

MATERIALS

Recycled plastic, aluminium

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of each lamp can be manually adjusted by swivelling shade around suspension ball.

SUSPENSION

Adjustable on site up to 300cm/118in. Longer cables can be supplied upon request.

CANOPY

Ø18cm/7in, 1.5kg/3lbs, tumbled aluminium finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 46 Watts
Light output: 4600 Lumens
Color temperature: 2700K
95+ CRI
Life hours 50.000

POWER SUPPLY

Integrated in canopy (multiple light power supply available by request)
Input: 120-277VAC, 0,6A, 50/60HZ
TRIAC/ELV/0-10V dimmable

DIMMING


The Fresnel is equipped for MAINS dimming (TRIAC) and 0-10V.

COMPLIANCE

CE, transformers (120-277V to 24V) comply with UL standards

CARE

Please ensure that the plastic never comes into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.

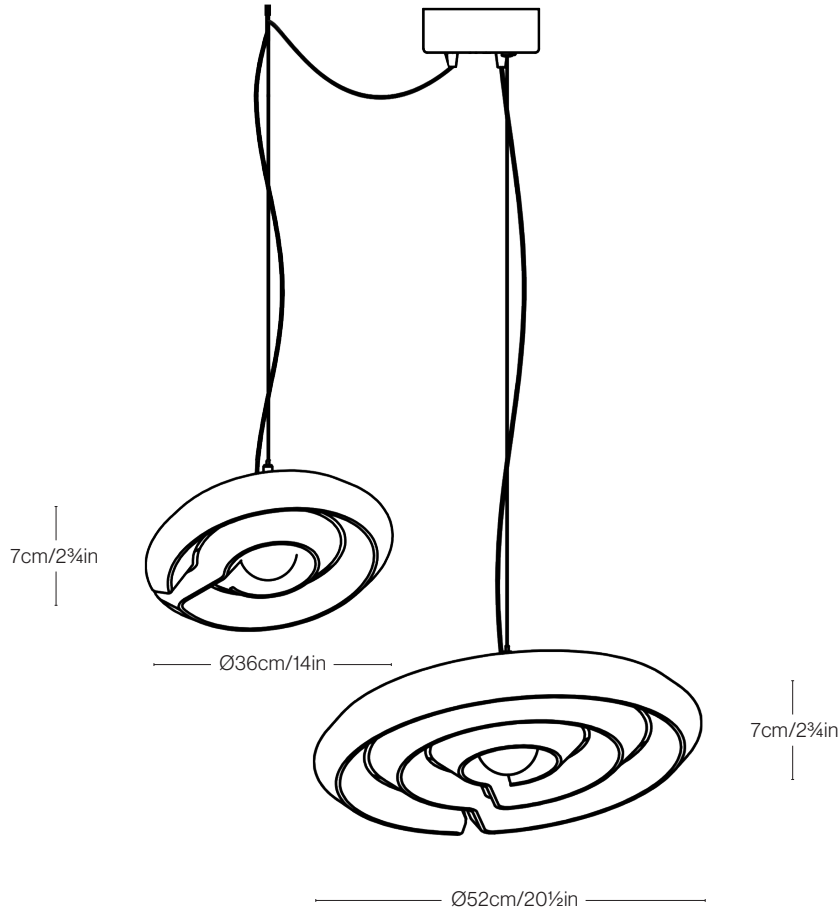

DIMENSIONS

Ø36cm/14in
H7cm/2¾in
+
Ø52cm/20½in
H7cm/2¾in

WEIGHT

10kg/22lb

MATERIALS

Recycled plastic, aluminium, steel

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of each lamp can be manually adjusted by swivelling shade around suspension ball.

SUSPENSION

Adjustable on site up to 300cm/118in. Longer cables can be supplied upon request.

CANOPY

Ø21cm/8in, 2.2kg/5lbs, RAL9010 powder-coat finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 46 Watts
Light output: 4600 Lumens
Color temperature: 2700K
95+ CRI
Life hours 50.000

POWER SUPPLY

Integrated in canopy (multiple light power supply available by request)
Input: 120-277VAC, 0,6A, 50/60HZ
TRIAC/ELV/0-10V dimmable

DIMMING


The Fresnel is equipped for MAINS dimming (TRIAC) and 0-10V.

COMPLIANCE

CE, transformers (120-277V to 24V) comply with UL standards

CARE

Please ensure that the plastic never comes into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.

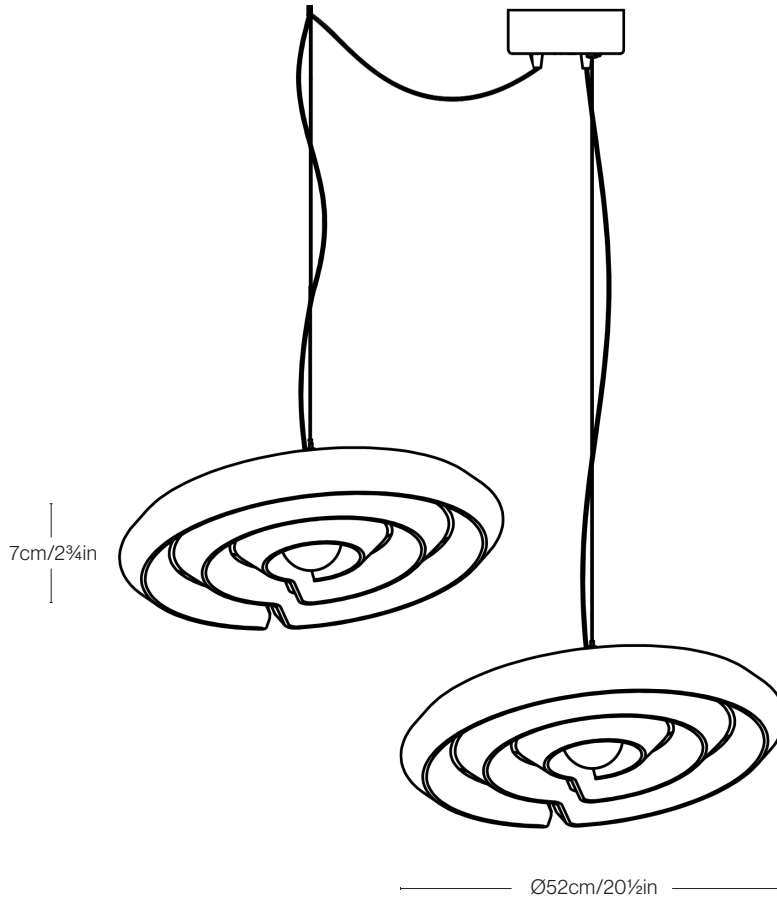

DIMENSIONS

Ø52cm/20 1/2in
H7cm/2 3/4in
+
Ø52cm/20 1/2in
H7cm/2 3/4in

WEIGHT

7kg/15lbs

MATERIALS

Recycled plastic, aluminium, steel

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of each lamp can be manually adjusted by swivelling shade around suspension ball.

SUSPENSION

Adjustable on site up to 300cm/118in. Longer cables can be supplied upon request.

CANOPY

Ø21cm/8in, 2.2kg/5lbs, RAL9010 powder-coat finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 46 Watts
Light output: 4600 Lumens
Color temperature: 2700K
95+ CRI
Life hours 50.000

POWER SUPPLY

Integrated in canopy (multiple light power supply available by request)
Input: 120-277VAC, 0,6A, 50/60HZ
TRIAC/ELV/0-10V dimmable

DIMMING

The Fresnel is equipped for MAINS dimming (TRIAC) and 0-10V.

COMPLIANCE

CE, transformers (120-277V to 24V) comply with UL standards


CARE

Please ensure that the plastic never comes into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.



Fresnel Wall S | SPECSHEET

kooij.com
office@kooij.com
+31 (0) 20 247 9600

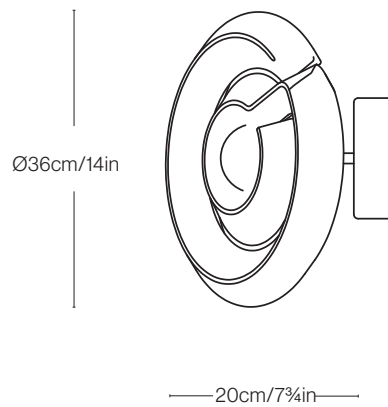

DIMENSIONS

Ø36cm/14in
W20cm/7¾in

WEIGHT

Light: 2kg/4½lbs

MATERIALS

Recycled plastic, aluminium

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of lamp can be manually adjusted by swivelling shade around mounting ball.

INSTALLATION

Mount directly to wall or ceiling.

CANOPY

Ø18cm/7in, 1.5kg/3lbs, tumbled aluminium finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 46 Watts
Light output: 4600 Lumens
Color temperature: 2700K
95+ CRI
Life hours 50.000

POWER SUPPLY

Integrated in canopy (multiple light power supply available by request)
Input: 120-277VAC, 0,6A, 50/60HZ
TRIAC/ELV/0-10V dimmable

DIMMING

The Fresnel is equipped for MAINS dimming (TRIAC) and 0-10V.

COMPLIANCE

CE, transformers (120-277V to 24V) comply with UL standards


CARE

Please ensure that the plastic never comes into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.



Fresnel Wall M | SPECSHEET

kooij.com
office@kooij.com
+31 (0) 20 247 9600

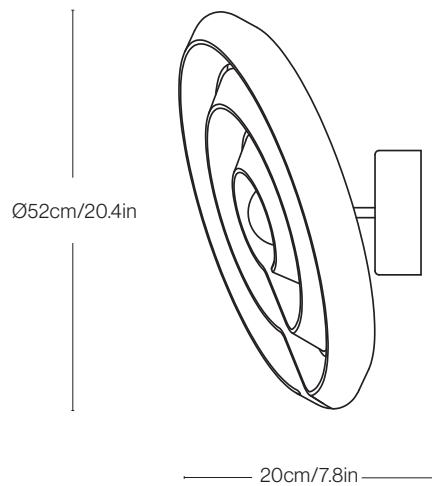

DIMENSIONS

Ø52cm/20.4in
W20cm/7.8in

WEIGHT

Light: 4kg/9lbs

MATERIALS

Recycled plastic, aluminium

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of lamp can be manually adjusted by swivelling shade around mounting ball.

INSTALLATION

Mount directly to wall or ceiling.

CANOPY

Ø18cm/7in, 1.5kg/3lbs, tumbled aluminium finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 46 Watts
Light output: 4600 Lumens
Color temperature: 2700K
95+ CRI
Life hours 50.000

POWER SUPPLY

Integrated in canopy (multiple light power supply available by request)
Input: 120-277VAC, 0,6A, 50/60HZ
TRIAC/ELV/0-10V dimmable

DIMMING

The Fresnel is equipped for MAINS dimming (TRIAC) and 0-10V.

COMPLIANCE

CE, transformers (120-277V to 24V) comply with UL standards


CARE

Please ensure that the plastic never comes into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.



Fresnel Wall L | SPECSHEET

kooij.com
office@kooij.com
+31 (0) 20 247 9600

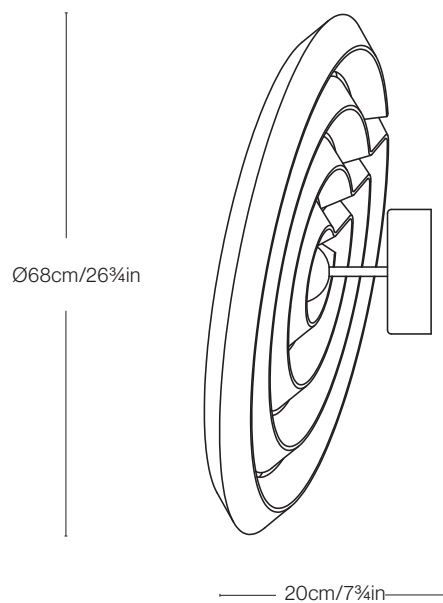

DIMENSIONS

$\text{Ø}68\text{cm}/26\frac{3}{4}\text{in}$
W20cm/7 $\frac{3}{4}$ in

WEIGHT

6kg/13lbs

MATERIALS

Recycled plastic, aluminium

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of lamp can be manually adjusted by swivelling shade around mounting ball.

INSTALLATION

Mount directly to wall or ceiling.

CANOPY

$\text{Ø}18\text{cm}/7\text{in}$, 1.5kg/3lbs, tumbled aluminium finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 46 Watts
Light output: 4600 Lumen
Colour temperature: 2700K
95+ CRI
Life hours 50.000

POWER SUPPLY

Integrated in canopy (multiple light power supply available by request)
Input: 120-277VAC, 0,6A, 50/60HZ
TRIAC/ELV/0-10V dimmable

DIMMING

The Fresnel is equipped for MAINS dimming (TRIAC) and 0-10V.

COMPLIANCE

CE, transformers (120-277V to 24V) comply with UL standards

CARE

Please ensure that the plastic never come into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.