



KO OIJ *Buitenhuis Specsheets*

Overview




Buitenhuis 120



Buitenhuis 160

KO OIJ Buitenhuis 120

Specsheet

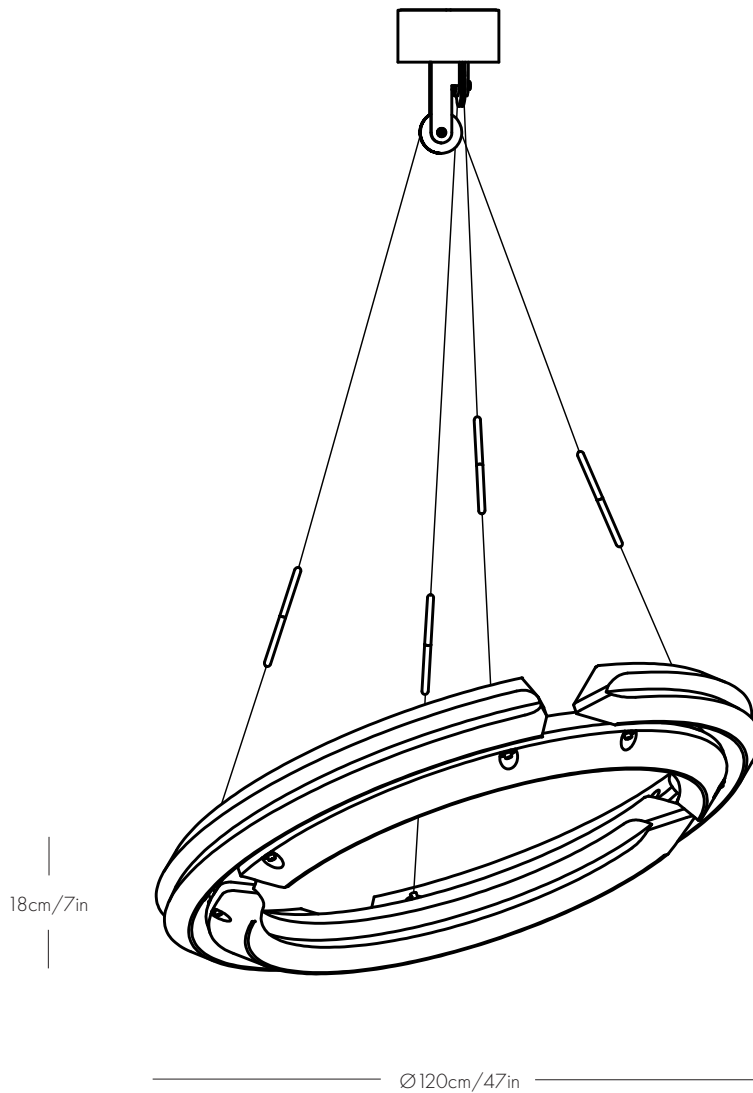

Dimensions

L 120cm/47in
W 120cm/47in
H 18cm/7in

Weight

25kg/55lb

Materials

Recycled plastic, brass,
steel, aluminium

Suspension

Angle of fixture manually adjustable
through tilting mechanism
Suspension cables double as low
voltage power cables
Drop: Adjustable on site within
150cm/59in to 500cm/197in
(Longer or shorter drops are
available upon request)
Canopy: 20cm/8in round in
textured RAL9010 finish

Illumination

Replaceable LED modules
Max. power consumption: 110 Watts
Light output: 11000 Lumens
Colour Temperature: 2700 K, 95+ CRI
Life Hours: 50.000

Power supply

Integrated in canopy
Input: 100-240VAC 1.7A 50/60Hz,
277VAC 0.7A 50/60Hz (North
America only)
Dimming: Choice between 3 in 1
(resistance, 0-10Vdc or 10V PWM)
and DALI
Life Hours: 40.000

Certifications


CE

Maintenance

Clean with dry cloth
Indoor use only

KO OIJ Buitenhuis 160

Specsheet

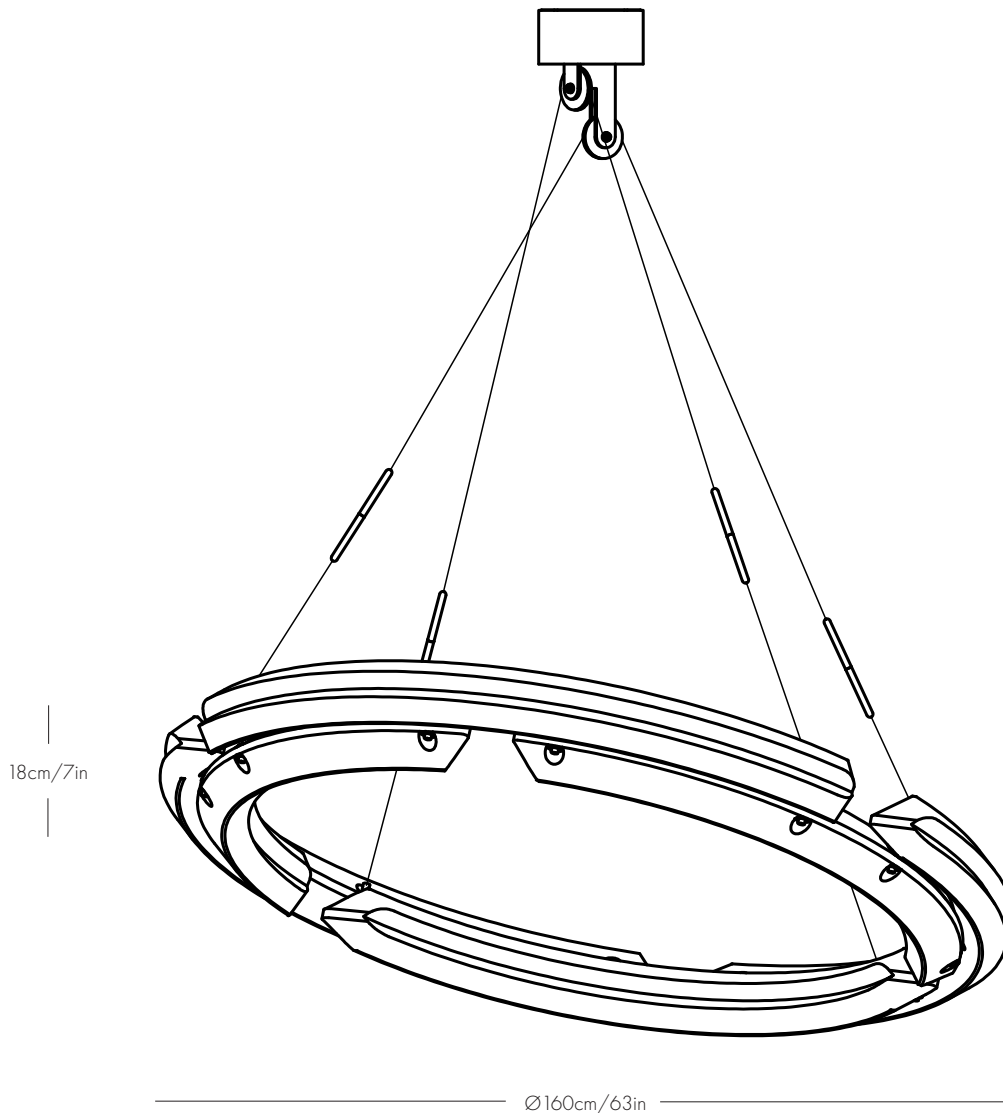

Dimensions

L 160cm/63in
W 160cm/63in
H 18cm/7in

Weight

35kg/77lb

Materials

Recycled plastic, brass,
steel, aluminium

Suspension

Angle of fixture manually adjustable
through tilting mechanism
Suspension cables double as low
voltage power cables
Drop: Adjustable on site within
150cm/59in to 500cm/197in
(Longer or shorter drops are
available upon request)
Canopy: 20cm/8in round in
textured RAL9010 finish

Illumination

Replaceable LED modules
Max power consumption: 153 Watts
Light output: 15300 Lumens
Colour Temperature: 2700K, 95+ CRI
Life Hours: 50.000

Power supply

Integrated in canopy
Input: 100-240VAC 1.7A 50/60Hz,
277VAC 0.7A 50/60Hz (North
America only)
Dimming: Choice between 3 in 1
(resistance, 0-10Vdc or 10V PWM)
and DALI
Life Hours: 40.000

Certifications

CE

Maintenance

Clean with dry cloth
Indoor use only