

DIMENSIONS

Ø120cm/47in
H18cm/7in

WEIGHT

25kg/55lbs

MATERIALS

Recycled plastic, brass, steel

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of fixture manually adjustable through tilting mechanism.

SUSPENSION

Suspension cables also serve to supply electricity adjustable on site within 150cm/59in to 500cm/197in (longer or shorter drops are available upon request)

CANOPY

20cm/8in
RAL9010 finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 153 Watts
Light output: 15300 Lumens
Colour temperature: 2700K, 95+ CRI
Life hours: 50.000

POWER SUPPLY

Integrated in canopy
Input: 100-240VAC 1.7A 50/60Hz, 277VAC 0.7A 50/60Hz (North America only)

DIMMING


Dimming: Choice between 3 in 1 (resistance, 0-10VDC or 10VPWM) and DALI
Life hours: 40.000

COMPLIANCE

CE, transformers (100-240V to 24V) comply with UL standards

CARE

Please ensure that the plastic never comes into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.

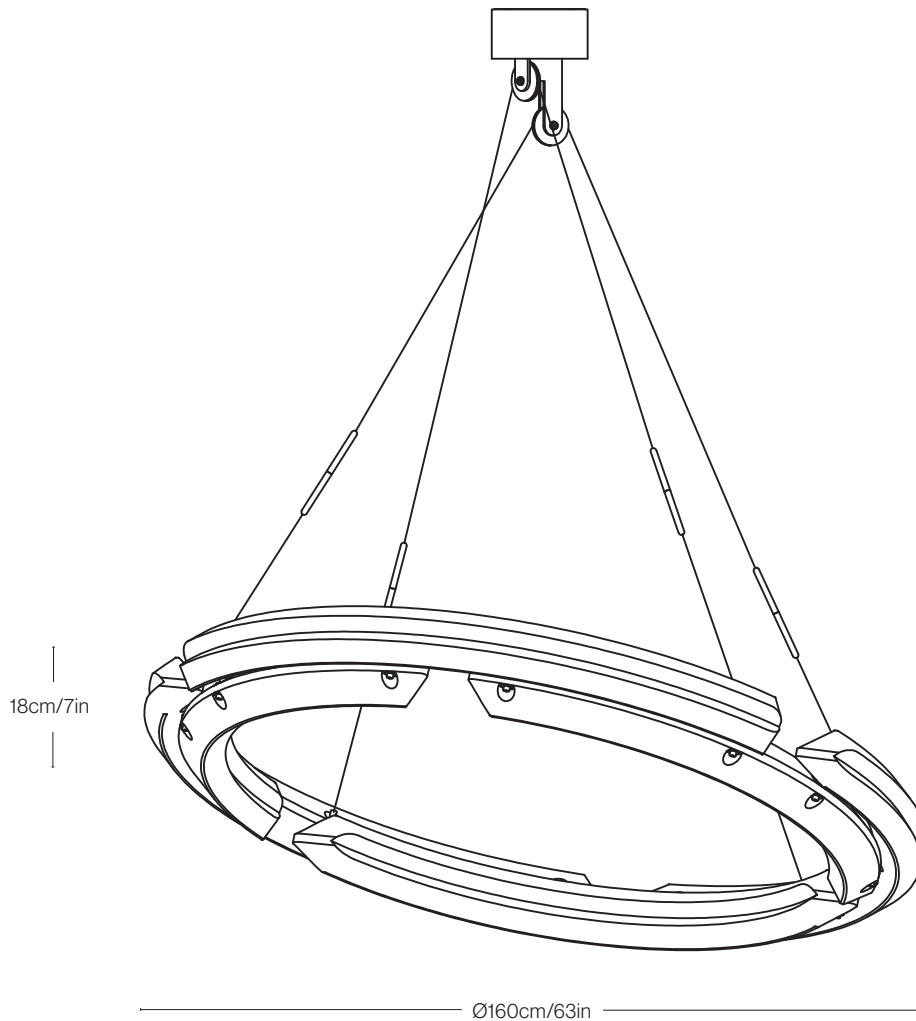

DIMENSIONS

Ø160cm/63in
H18cm/7in

WEIGHT

35kg/77lbs

MATERIALS

Recycled plastic, brass, steel

COLOUR

Due to the recycled nature of our transparent source material, no two units will have an identical tint.

ADJUSTMENT

Angle of fixture manually adjustable through hand-tilting mechanism.

SUSPENSION

Suspension cables also serve to supply electricity
Adjustable on site within 150cm/59in to 500cm/197in
Can be made longer upon request.

CANOPY

20cm/8in, 1kg/2.2lb, RAL9010 powder-coat finish

ILLUMINATION

Replaceable LED modules
Max power consumption: 153 Watts
Light output: 15300 Lumen
Colour temperature: 2700K, 95+ CRI
Life hours: 50.000

POWER

Integrated in canopy
Input: 100-240VAC 1.7A 50/60Hz, 277VAC 0.7A 50/60Hz (North America only)

DIMMING

Dimming: Choice between 3 in 1 (Resistance, 0-10VDC or 10VPWM) and DALI
Life hours: 40.000

COMPLIANCE

CE, transformers (100-240V to 24V) comply with UL standards

CARE

Please ensure that the plastic never comes into contact with acetone or other chemical cleaners. Regular dusting is recommended. Not suitable for use outdoors.